

integer

Lights



ELEVATE

The Elevate Architectural Multiple Series offers a point source solution that is available in a double gimbal or single gimbal with retractable yoke. Offered in an assortment of lumen, color temperature, beam angle, and filter options that may be modified in the field. Modules are available in bevel, regress, or snoot appearance.

Lumen Per Head:
800 - 1650lm


Color Temperature:
2700K, 3000K, 3500K, 4000K

Optical Distribution:
18°, 30°, 50°, 80°

Filter:
Frosted, Solite, Honey Comb

Adjustability:
0-35° Tilt

Dimming:
8 Dimming options

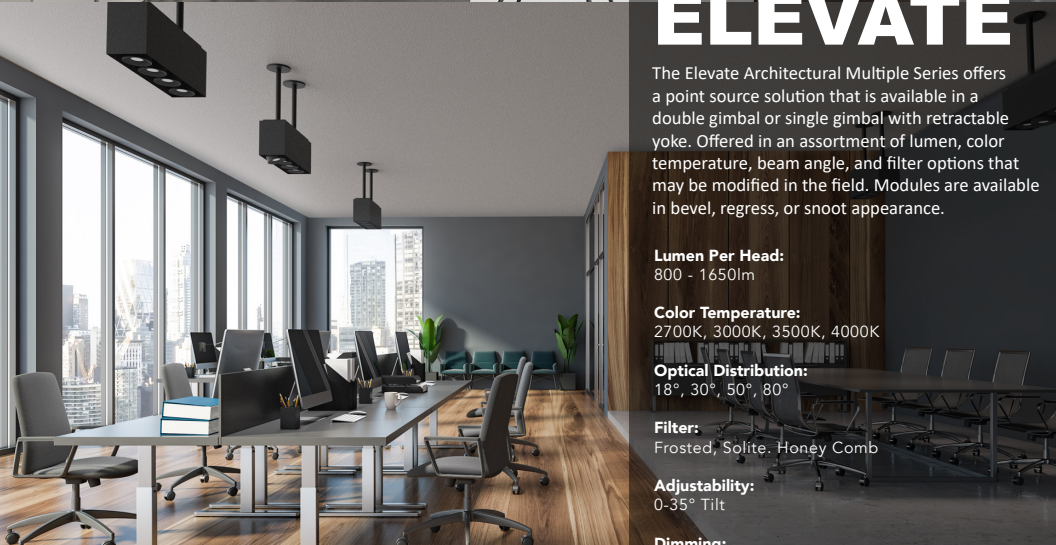

ELEVATE




Recessed



Cable



Pendant

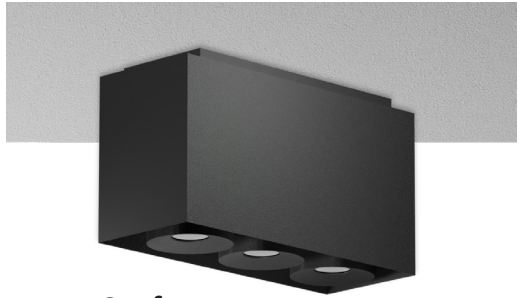

Surface

LUMENS PER HEAD

800 - 1650lm

COLOR TEMPERATURE

2700K, 3000K, 3500K, 4000K

OPTICAL DISTRIBUTION

18°, 30°, 50°, 80°

DIMMING

Available in 8 driver selections

- Intelligent Drive (ELV, TRIAC, 0-10 Dimming), 120-277V
- Lutron Hi-Lume Premier EcoSystem 0.1% w/ soft-on, fade to black
- Lutron Hi-Lume 1% Ecosystem with soft on, fade to black, 120V-277V


- Hi-Lume 1% 2-wire, 120V
- eldoLED Eco 1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (DALI), 120-277V

FILTERS



Frosted, Solite, Honey Comb

MODULE MECHANISM




Tilt and Rotatable


MODULE TYPE



B - Bevel



R - Regress



S - Snoot