

2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC



GENERAL INFORMATION

USE OF PRODUCT

The 2" Prime Wall Wash is a small aperture fixture with shallow height that may be used in residential and commercial applications. Die cast trims, with an assortment of color temperatures, optics and dimmable drivers available.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below ceiling.

OPTICAL LENS

Field replaceable optical lenses are available in 15°, 24°, 36°, and 50°. Easily achieve narrow spot to wide flood beam pattern.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

GENERAL PERFORMANCE CHART

*Detailed performance chart may be found on page 2

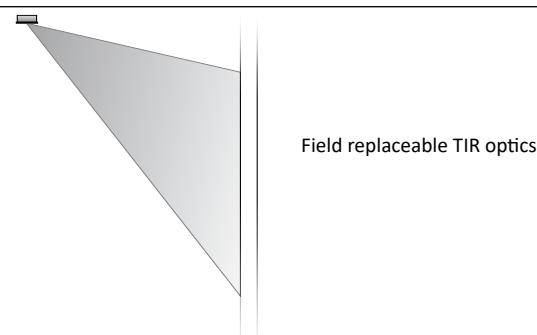
	6W	9W	12W	15W	20W
Initial Lumens	955	1296	1618	2015	2422
Delivered Lumens	593-619	805-840	1009-1050	1225-1273	1486-1546

* Values are listed at 3000K, 90+ CRI with a white bevel & trim.




Delivered lumens range based on beam spread.

Performance may vary +/- 5%

BEAM SPREAD



PRIME FAMILY OF PRODUCTS



2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC

ORDERING INFORMATION

Series	Wattage	Dimming	Color Temperature	Optical Lens	Housing Type
RPA2	6W - 6 Watt	ID ¹ - Standard All-Inclusive ELV(120V), Triac(120V), and 0-10V(120-277V)	27K - 2700K	15 - 15°	IC - IC Air-Tight New Construction
	9W - 9 Watt		30K - 3000K	24 - 24°	NC - Non-IC New Construction
	12W - 12 Watt	Dimming Driver (Intelligent Drive)	35K - 3500K	36 - 36°	
	15W - 15 Watt	EEI ² - eldoLED 1% Dim 0-10V (120-127V), Triac (120V)	40K - 4000K	50 - 50°	
	20W - 20 Watt	EDIO ³ - eldoLED 0.1% Dim (0-10V) EDID ⁴ - eldoLED 0.1% Dim (DALI) EDD ⁵ - eldoLED 1% Dim (DALI2) PEQQ - Lutron Hi-Lume Premier Ecosystem 0.1% with Soft-on, Fade-to-Black Dimming			

Collar	Module Type	Trim Style	Frame Accessories	Options
CS10 - 1.0" Depth	AMHW - Accent Wall Wash	LPS - Flangeless Plaster	UH - Universal Bar Hanger	ER4W ⁶ - Emergency Battery with Remote test switch (400 lm)
CS15 - 1.5" Depth		LAMS - Flangeless Millwork with Adapter	C - C-Channel Bar Hanger	ER8W ⁵ - Emergency Battery with Remote test switch (800 lm)
MTO - Made To Order		LDMS - Flangeless Millwork with Dedicated Collar		ER15W ⁵ - Emergency Battery with Remote test switch (1,500 lm)
				347V - 347V Step down transformer
				CP ⁶ - Chicago Plenum

TRIM ORDERING INFORMATION

DIE-CAST

Bevel Finish	Bevel	Finish	Notes
2" Square Flangeless Accent	2SLA-CL 2SLA-CL 2SLA-CL 2SLA-CL 2SLA-CL	W - White B - Black H - Haze BZ - Bronze MTO - Made To Order	<ol style="list-style-type: none"> Intelligent Drive is the standard driver. Programmable only in linear mode. Must specify logarithmic or linear eldoLED diver. Available in IC housing only. Ceiling access is required for IC housing to replace the EM unit. Requires IC housing.

2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC

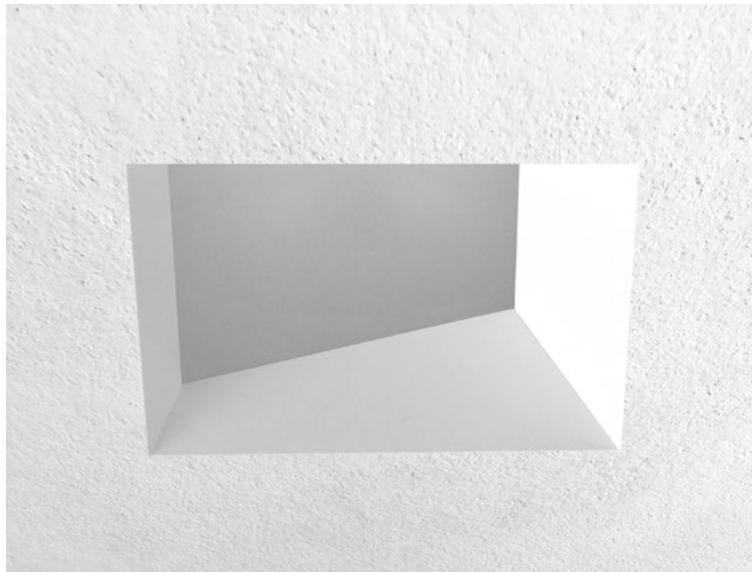
PERFORMANCE CHART

Optics	15°	24°	36°	50°
6W	Initial Lumens	955	955	955
	Delivered Lumens	593	618	619
9W	Initial Lumens	1296	1296	1296
	Delivered Lumens	805	840	840
12W	Initial Lumens	1618	1618	1618
	Delivered Lumens	1009	1050	1050
15W	Initial Lumens	2015	2015	2015
	Delivered Lumens	1225	1273	1273
20W	Initial Lumens	2422	2422	2422
	Delivered Lumens	1486	1543	1546

* Values are listed at 3000K, 90+ CRI with a white bevel & trim.

COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

2700K	3000K	3500K	4000K
0.95	1.00	1.04	1.07

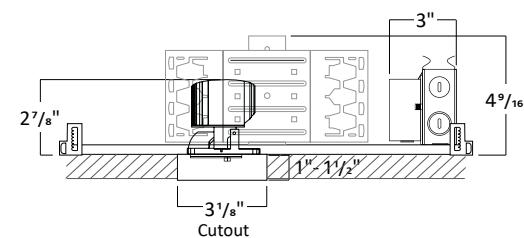
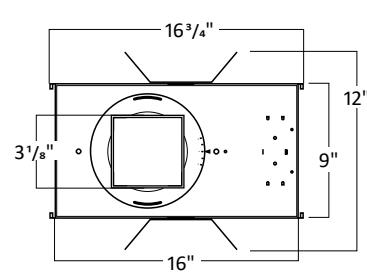
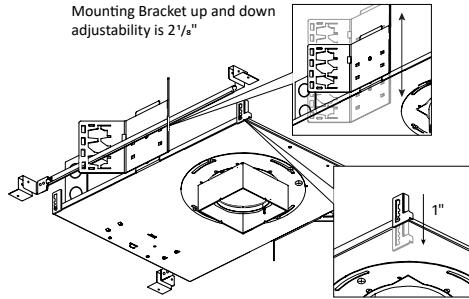
DIFFUSED LENS

- Listed IES files are with diffused lens

2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

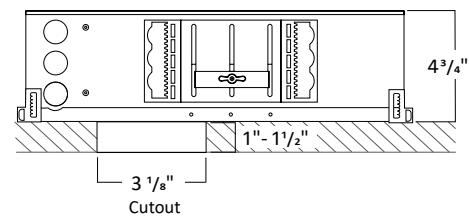
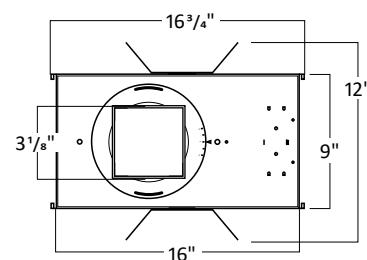
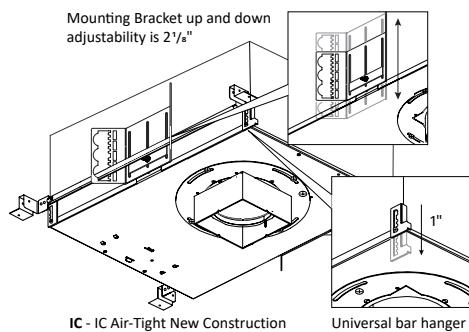
NEW CONSTRUCTION: IC & NON IC

NON-IC HOUSING DIMENSIONS



1. Must remove spacer to achieve $1\frac{1}{2}$ " collar height
2. Consult factory for Made to Order collar height
3. Allow $\frac{1}{8}$ " tolerance

IC HOUSING DIMENSIONS



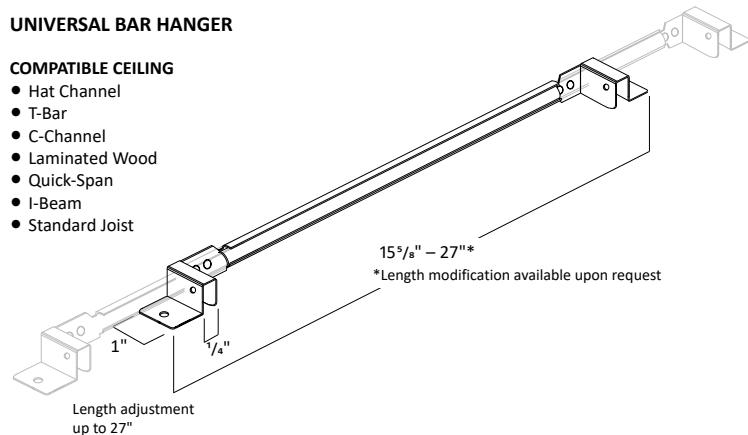
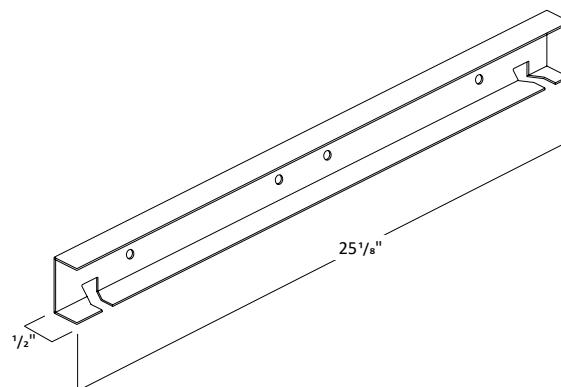
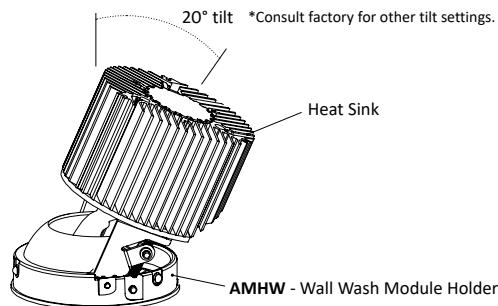
1. Must remove spacer to achieve $1\frac{1}{2}$ " collar height
2. Consult factory for Made to Order collar height
3. Allow $\frac{1}{8}$ " tolerance

2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC

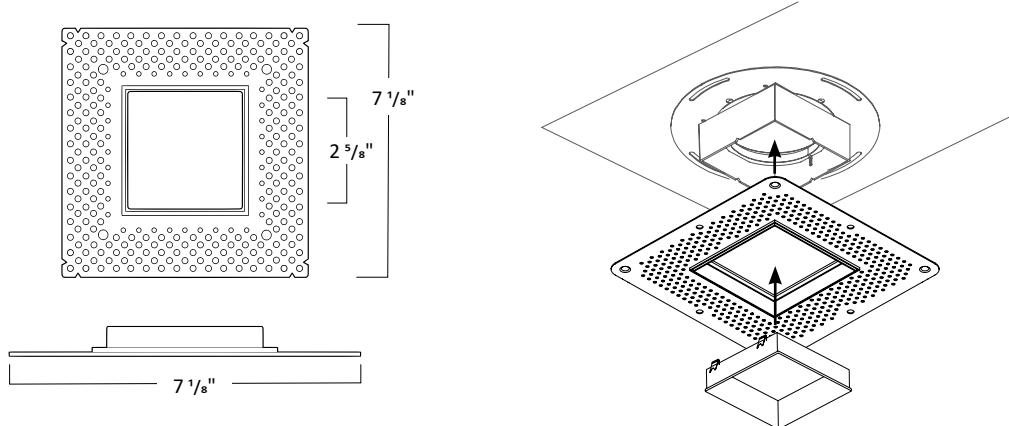
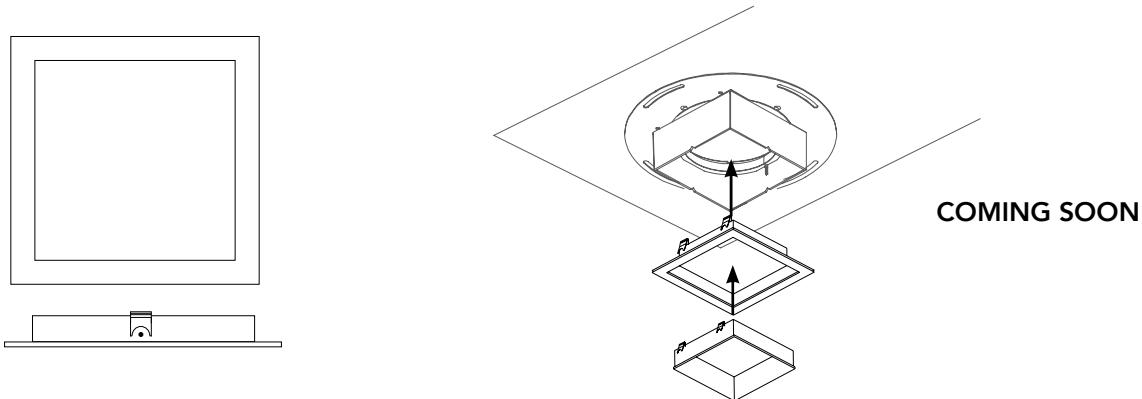
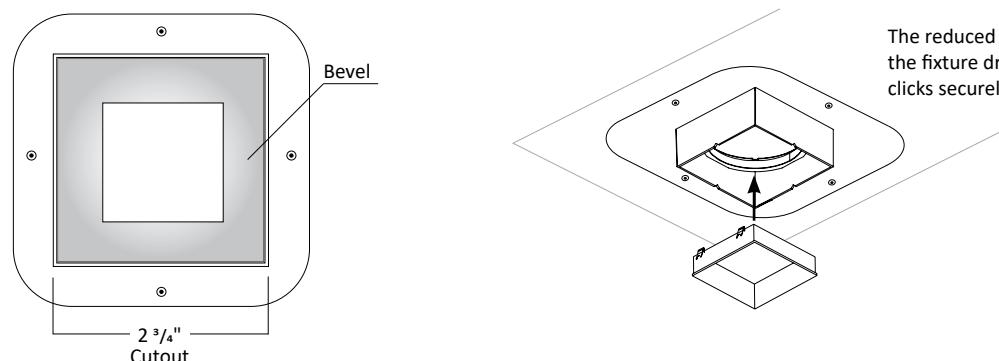
FRAME ACCESSORIES**UNIVERSAL BAR HANGER****COMPATIBLE CEILING**

- Hat Channel
- T-Bar
- C-Channel
- Laminated Wood
- Quick-Span
- I-Beam
- Standard Joist

**C-CHANNEL BAR HANGER****MODULE DIMENSIONS**

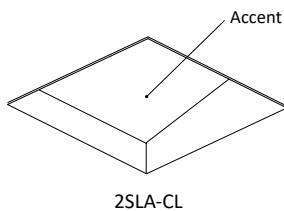
2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC

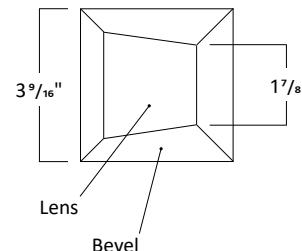
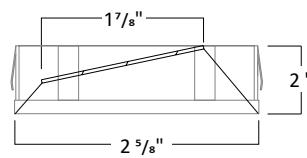
FLANGELESS PLASTER (LPS)**FLANGELESS MILLWORK WITH ADAPTER (LAMS)****FLANGELESS MILLWORK WITH DEDICATED COLLAR (LDMS)**

2" LED ARCHITECTURAL ROUND FLANGELESS WALL WASH

NEW CONSTRUCTION: IC & NON IC

TRIM DIMENSIONS

2SLA-CL

**TRIM FINISH**

White



Black

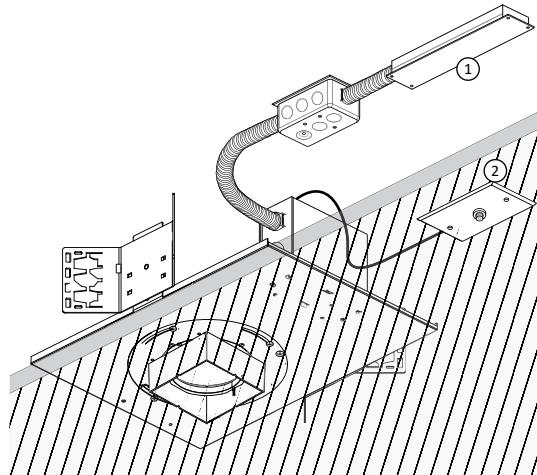


Haze



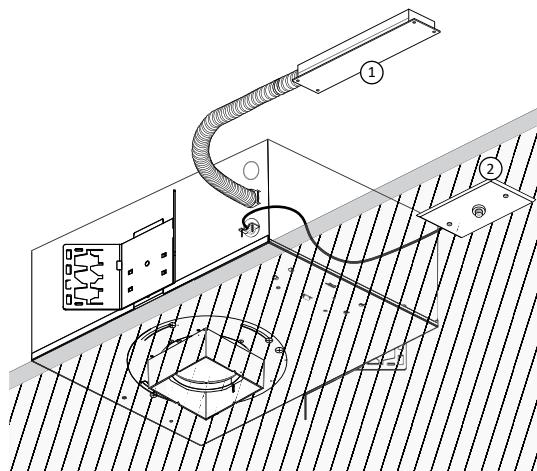
Bronze

*Consult Factory for Made to Order Finishes

REMOTE EMERGENCY BATTERY: NON-IC NEW CONSTRUCTION HOUSING**NC - Non-IC New Construction**

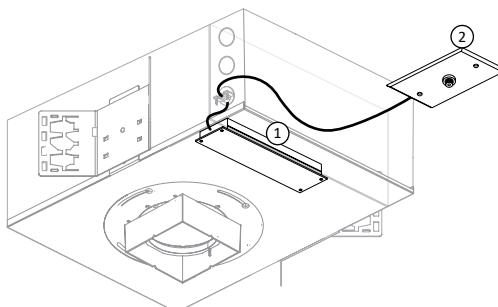
ER8W and **ER15W** is an 8W and 15W Emergency Battery that is remote to the fixture with a remote test switch. The EM unit is accessible from below the ceiling for replacement purposes.

1. Remote Emergency Battery
2. Remote Test Switch

REMOTE EMERGENCY BATTERY: IC NEW CONSTRUCTION HOUSING**IC - IC Air-Tight New Construction**

ER8W and **ER15W** is an 8W and 15W Emergency Battery that is remote to the fixture with a remote test switch. Ceiling access is required for replacement purposes

1. Remote Emergency Battery
2. Remote Test Switch

INTEGRAL EMERGENCY BATTERY: IC NEW CONSTRUCTION HOUSING**IC - IC Air-Tight New Construction**

ER4W is an 4W Emergency Battery that is integral to the fixture with a remote test switch. The EM unit is accessible from below the ceiling for replacement purposes.

*Available in IC housing only

1. Integral Emergency Battery
2. Remote Test Switch