



GENERAL INFORMATION

USE OF PRODUCT

The 3" Prime Downlight is a small aperture fixture with a super shallow housing height of 2½", which is ideal for residential and commercial applications. Available options include die-cast trims, various temperatures, optics, and dimmable drivers.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 90+ CRI. 2-step MacAdam ellipse allows for color consistency between fixtures. The LED is mounted to an aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below the ceiling.

FRAME CONSTRUCTION

IC-rated super shallow housing is constructed from a 16-gauge heavy-duty, powder-coated cold-rolled steel frame and includes a junction box with ½" knockouts. Butterfly brackets (included) accommodate adjustable bar hanger (order separately).

ADJUSTMENT

- Housing supports 359° locking rotation.
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment.
- Aperture collar compatible up to 1½" ceiling thickness. Consult factory for made-to-order aperture collars exceeding 1½".

OPTICAL LENS

Field replaceable optical lenses are available in 12°, 25°, 30°, 40°, 50°, and 70°. Easily achieve narrow spot to wide flood beam pattern.

DIMMING

Available in nine driver selections. (ID) Standard all-inclusive ELV (120V), Triac (120V), and 0-10V (120-277V) dimming driver called Intelligent Drive, (EEI) eldoLED 1% Dim 0-10V (120-277V) and Triac (120V), (EDIO) eldoLED 0.1 Dim 0-10V, (EDID) eldoLED 0.1% Dim DALI, (EDD) eldoLED 1% Dim DALI2.

BEVEL

Bevel includes standard frosted acrylic diffuser. Remove standard frosted acrylic diffuser in field for 7% lumens increase. Consult factory for made-to-order finishes. Wet location for bathrooms and showers with standard lens on trim.

EMERGENCY BATTERY

Optional 8W Emergency Battery (EM) available in 8W (~800 lm) available for a minimum of 90 minutes. Ceiling access is required to replace the EM unit.

LABELS/COMPLIANCE/WARRANTY

- CSA listed for US and Canada.
- Energy Star certified product.
- Dry/Damp/Wet location rated.
- State of California Title 24 and JA8 compliant.
- 5-year limited warranty.




GENERAL PERFORMANCE CHART

*Detailed performance chart may be found on page 3

	6W	9W	12W	15W
Initial Lumens	657/955	890/1296	1122/1618	1267/2015
Delivered Lumens	586-755	794-1038	999-1319	1060-1642

* Values are listed at 3000K, 90+ CRI with a white bevel & trim.
Delivered lumens range based on beam spread.
Performance may vary +/- 5%.

BEAM SPREAD

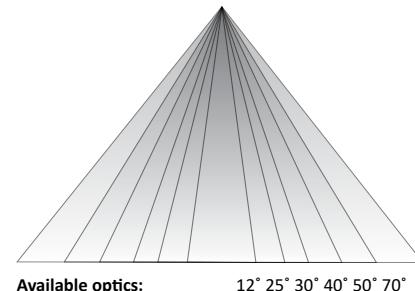

- Field replaceable TIR optics
- Easily achieve narrow spot to wide flood beam pattern
- Optional filters available upon request

PRIME FAMILY OF PRODUCTS




Downlight




TechZone®



WoodWorks®



Multiple Dedicated Bevel



Multiple Open Bevel



Cylinder



Square Luminaire

ORDERING INFORMATION

Series	Wattage	Dimming	Color Temperature	Optical Lens	Filter	Housing Type
RPA3S	6W - 6 Watt	ID ¹ - Standard All-Inclusive ELV, Triac, and 0-10V Dimming Driver (Intelligent Drive)	27K - 2700K	12 ² - 12°	Blank - None	IC - IC Super Shallow
	9W - 9 Watt		30K - 3000K	25 - 25°	F - Frosted Filter	New Construction
	12W - 12 Watt	EEI ² - eldoLED 1% Dim (0-10V)	35K - 3500K	30 - 30°	H - Honey Comb	
	15W - 15 Watt	EEIS ² - eldoLED 1% Dim 0-10V (120-277V), Triac (120V), Max 20W	40K - 4000K	40 - 40°	S - Solite Filter	
		EDIO ² - eldoLED 0.1% Dim (0-10V)		50 - 50°	L - Linear Filter	
		EDID ² - eldoLED 0.1% Dim (DALI)		70 - 70°		
		EDD ² - eldoLED 1% Dim (DALI2)				

Collar	Trim Style	Frame Accessories	Options
CS15 - 1.5" Depth	LPS - Flangeless Plaster	AH - Adjustable Bar Hanger	ER8W ⁴ - Emergency Battery with Remote test switch (800 lm)
MTO - Made To Order	LAMS - Flangeless Millwork with Adapter		CP - Chicago Plenum
	LDMS - Flangeless Millwork with Dedicated Collar		

TRIM ORDERING INFORMATION

DIE-CAST

Bevel Finish	Bevel	Finish	Notes
3" Square Flangeless Open Large	3SLO-CL 3SLO-CL 3SLO-CL 3SLO-CL 3SLO-CL 3SLO-CL	W - White B - Black H - Haze BZ - Bronze C - Clear MTO - Made To Order	<ol style="list-style-type: none"> Intelligent Drive is the standard driver. Must specify logarithmic or linear eldoLED diver. 12° spread without lens on trim. Ceiling access is required to replace the EM unit.
3" Square Flangeless Open Small	3SLO-CS 3SLO-CS 3SLO-CS 3SLO-CS 3SLO-CS 3SLO-CS	W - White B - Black H - Haze BZ - Bronze C - Clear MTO - Made To Order	

PERFORMANCE CHART

Optics	12°	25°	30°	40°	50°	70°
6W	Initial Lumens	657	955	955	955	955
	Delivered Lumens	586	718	755	754	726
	UGR		13.5	13	16.4	19.1
9W	Initial Lumens	890	1296	1296	1296	1296
	Delivered Lumens	794	978	1034	1038	984
	UGR		14.6	14.3	17.7	19.6
12W	Initial Lumens	1122	1618	1618	1618	1618
	Delivered Lumens	999	1225	1314	1319	1238
	UGR		15.2	15.1	18.3	21.2
15W	Initial Lumens	1267	2015	2015	2015	2015
	Delivered Lumens	1060	1470	1628	1642	1565
	UGR		15.9	15.8	19	21.9
						23.6

* Values are listed at 3000K, 90+ CRI with a white bevel & trim.

Notes

1. 12° spread without lens on trim

COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

2700K	3000K	3500K	4000K
0.95	1.00	1.04	1.07

DIFFUSED LENS




- Listed IES files are with diffused lens



OPTIONAL FIELD REMOVABLE LENS



- Not suitable for wet locations
- Increase in lumens by approximately 7%


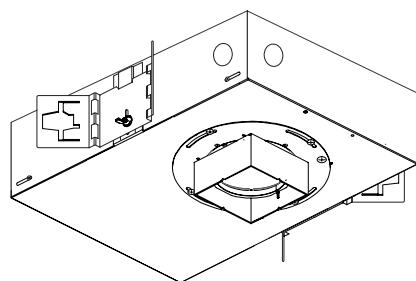
HOUSING DIMENSIONS

IC - IC Super Shallow New Construction

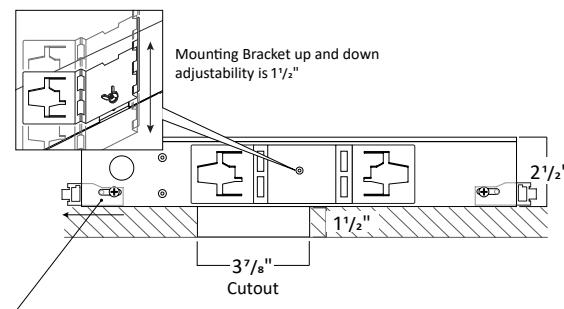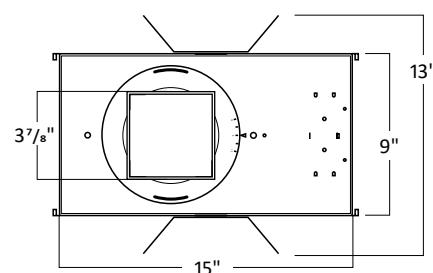

Mounting Bracket up and down adjustability is 1 1/2"

1. Consult factory for Made to Order collar height
2. Allow 1/8" tolerance

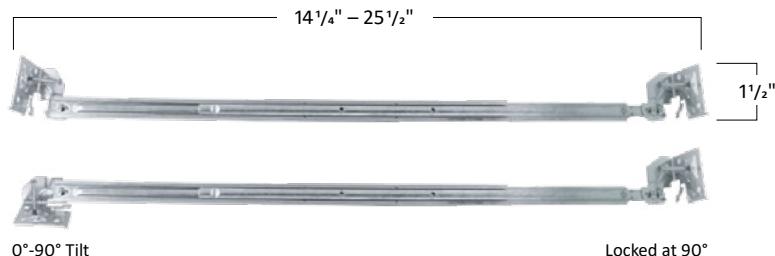
FRAME ACCESSORIES**AH - Adjustable Bar Hanger**

0°-90° Tilt


Locked at 90°

FILTERS


Frosted Filter






Honey Comb



Solite Filter









Linear Filter

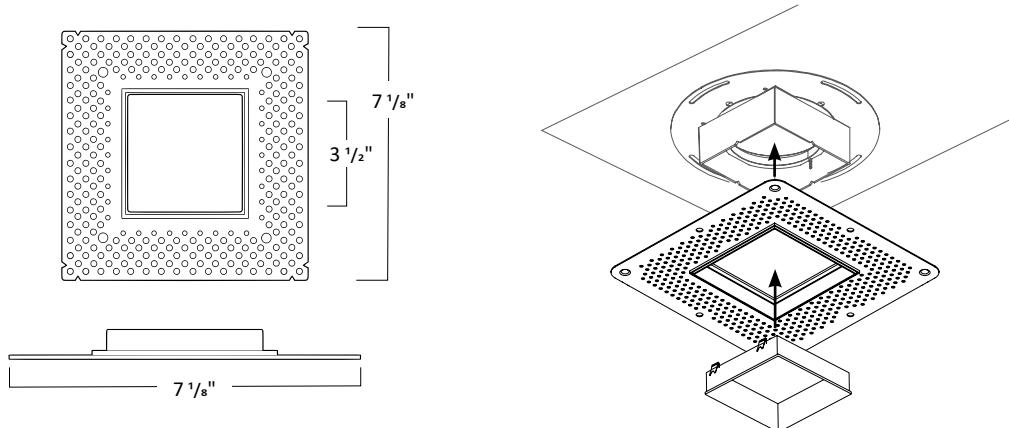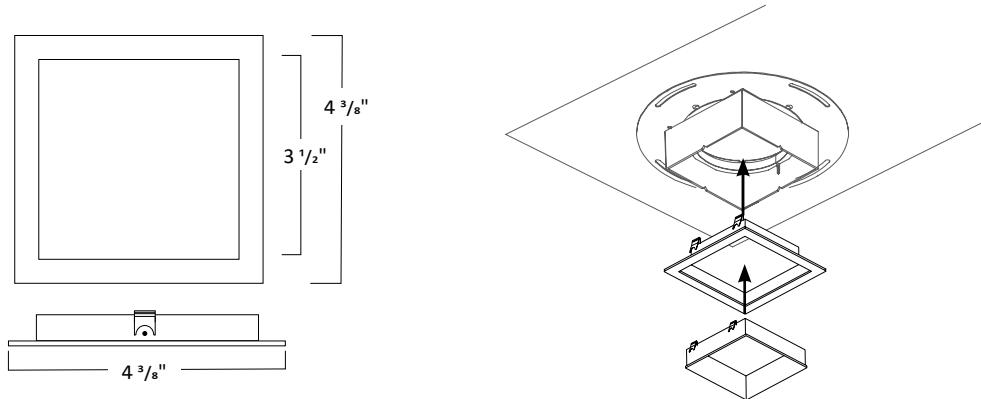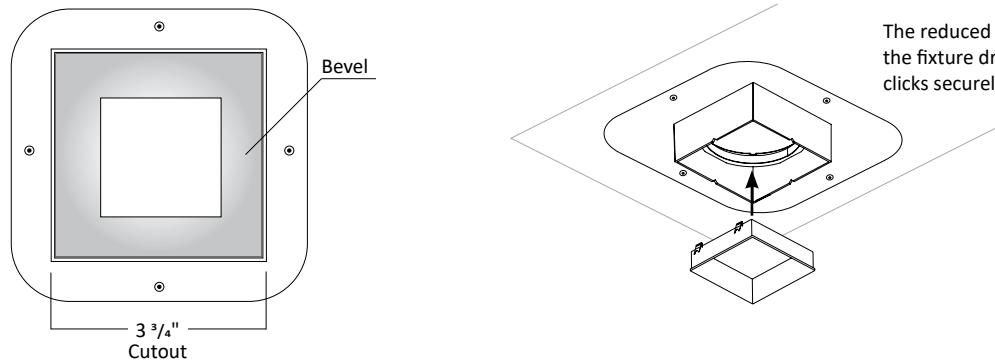FLANGELESS PLASTER (LPS)**FLANGELESS MILLWORK WITH ADAPTER (LAMS)****FLANGELESS MILLWORK WITH DEDICATED COLLAR (LDMS)**

The reduced collar diameter allows for easy installation; the fixture drops into the ceiling opening and the bevel clicks securely into the collar.

TRIM DIMENSIONS



TRIM FINISH



White



Black



Haze




Bronze



Clear

*Consult Factory for Made to Order Finishes

REMOTE EMERGENCY BATTERY

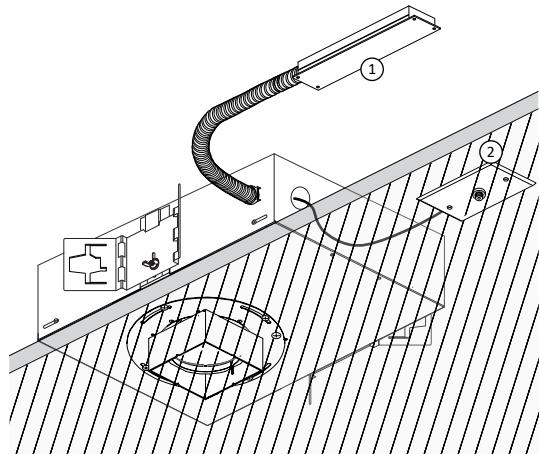

IC - Super Shallow New Construction

ER8W is an 8W Emergency Battery that is remote to the fixture with a remote test switch. Ceiling access is required for replacement purposes.

1. Remote Emergency Battery
2. Remote Test Switch